




PRODUCT MANUAL

HAMMOCK SPRING INSTALLATION

TT503HS

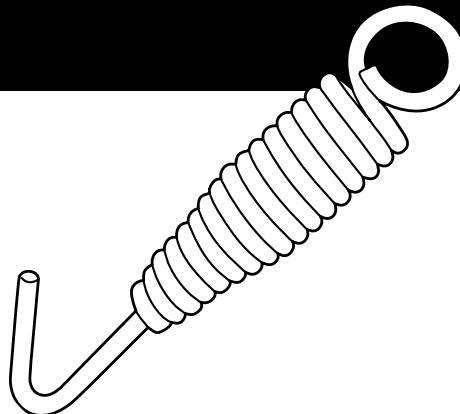

200KG CAPACITY



WARNING

Read instructions before use and keep for future reference. Failure to read these instructions before use can lead to an increased risk of injury. When installing always check with a qualified builder for safety. Two Trees will only guarantee the performance of this product when used with other Two Trees products. i.e. if non Two Trees hammocks are used, the guarantee is void.

Thank you for purchasing a Two Trees Hammock Spring.

We at Two Trees know the importance of spending time relaxing. Hence we've developed a range of quality hammocks and convenient accessories that come with easy to follow instructions so that you will be relaxing in no time. It is important to read all instructions before use and take care when using your hammock. Please ensure that you adhere to the following safety measures to get the maximum enjoyment from your new hammock.



WARNING


Read instructions before use and keep for future reference. Failure to read these instructions before use can lead to an increased risk of injury. When installing always check with a qualified builder for safety.

CAUTION AND SAFETY INSTRUCTIONS


1. Assembly must be carried out by an Adult.
2. Ensure hammock is fully assembled before use.
3. **DO NOT** exceed the maximum load of 200kgs.
4. **DO NOT** climb into hammock feet first.
5. **DO NOT** stand in hammock.
6. **DO NOT** dive into or jump about in hammock.
7. **DO NOT** stick your head through the suspension cords.
8. Keep suspension cords as straight as possible, **DO NOT** twist.
9. **DO NOT** use damaged or weakened hammock hanging accessories.
10. Hammock fabrics and accessories will wear over time and use. Always check the loading capacity and condition of parts before use.
11. Hammocks are not designed for swinging, playing, climbing or to be used as a children's toy.
12. **DO NOT** leave children or pets unattended in or near hammock.
13. Hammock fabric, suspension cords and hanging accessories will become worn over time and use. Always inspect prior to use and **DO NOT** use if items show signs of damage or weakness.
14. Always check the loading capacity before use.
15. Keep hammock clear of obstructions.
16. Allow a minimum of 50cm clearance range around the perimeter of your hammock when in use (Fig. 1).
17. Only use the hammock on level floors with shock-absorbing properties such as carpet or outdoor grass to minimise the risk of injury in case of an accident. **DO NOT** use on slippery or hard surfaces.
18. Never use a free standing brick wall to hang your hammock.
19. Only use Two Trees accessories for hanging your hammock.
20. **DO NOT** modify hammock. Hammock must be used in accordance of this manual.
21. **DO NOT** smoke in or around the hammock. Keep away from heat or flames.
22. **DO NOT** use whilst wearing shoes, clothing, jewellery or accessories that have a hook and loop fastener.
23. **DO NOT** use near sharp objects.
24. A copy of this manual must be provided should the hammock transfer ownership.

SELECTING THE LOCATION


There are many ways to hang your hammock, here are some of our favourite and recommended options:

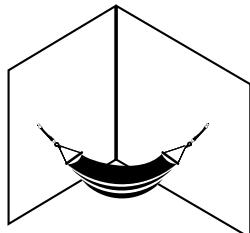

BETWEEN
TWO WALLS



BETWEEN
TWO POSTS

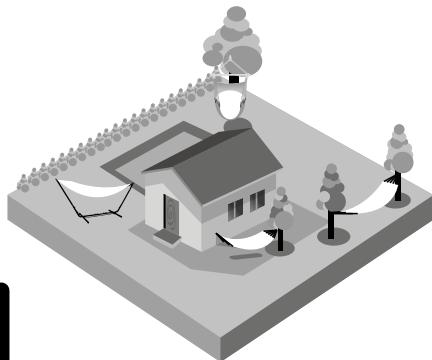


THE TWO TREES HAMMOCKS RANGE INCLUDES





WARNING

Read instructions before use and keep for future reference. Failure to read these instructions before use can lead to an increased risk of injury. When installing always check with a qualified builder for safety.

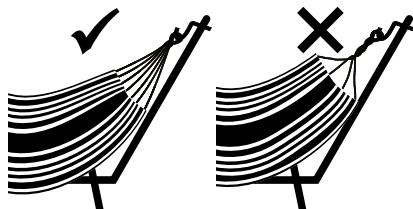

DO NOT twist or knot suspension cords when hanging.



Hammocks will stretch by 5-10% after the first few uses. Adjustments can be made after each use to keep you and your hammock comfortable.




DO NOT exceed the maximum load of 200kgs.



DO NOT leave children or pets unattended in or near hammock.


THINGS TO CONSIDER

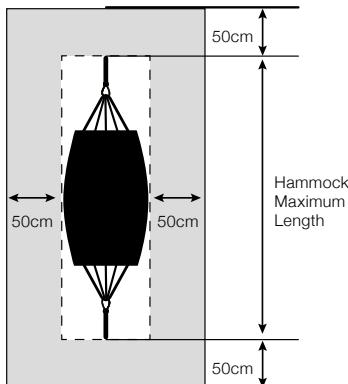

Allow a minimum of 50cm clearance range around the perimeter of your hammock when in use. <Fig.1>

You need a minimum of 3 metres between each anchor point to get the ideal shape. For longer distances, simply add a fixing strap or some rope and increase the height of the anchor point approximately 60cm for every additional metre in length.

Depending on the hammock the angle will vary. Conventional hammocks are hung with sag at approx. 110 degrees. Rod hammocks are hung taut at approx. 150 degrees.

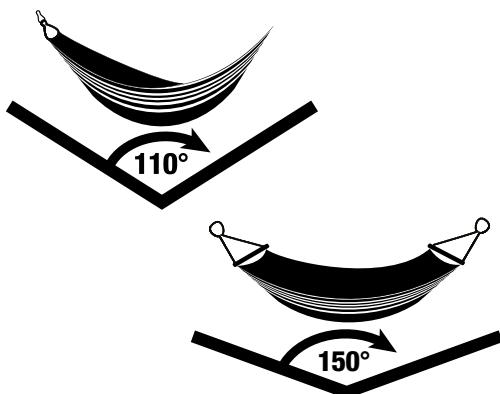

HOW TO HANG YOUR HAMMOCK


To hang your Two Trees hammock you will require two fixed points, such as trees, beams, posts, or dyna bolts into brick walls. Alternatively you can purchase a Two Trees Universal Stand. Consult a qualified builder if unsure.



WARNING: Never use a free standing brick wall to hang your hammock.

Your Two Trees hammock will require a minimum of 3 metres between fixing points to get the ideal shape. Rope may be needed to attach one end of the hammock, it is recommended to use a double piece to avoid the hammock twisting.

Hang the hammock loops at roughly the same height. When the hammock is in use it should sit 20-30cm above the ground.

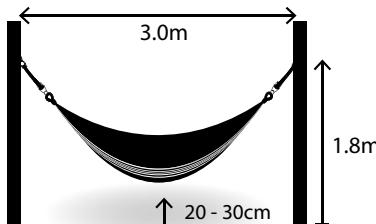

Designed for added comfort and safety on all hammock installations. Prior to installing your hammock, ensure the structure being used to suspend the hammock is strong enough to carry your body weight.

For perfect results, use your Two Trees hammock spring (TT503HS) with Two Trees hammock hooks (TT502HH). Use two springs on each end to evenly distribute weight and provide extra support and comfort. A rope or chain can be used as a connection between your hammock and fixture point.

1. Follow permanent installation instructions.
2. Place hammock spring on the hook. Repeat the process for the other side of hammock.
3. Ensure both springs are secure and then place hammock ends over hooks.

For hammock chairs, fix the hanging point from directly above the chair using a rope or chain in conjunction with your Two Trees hammock spring.


NOTE: TT503HS hammock spring can not be used with the Temporary installation kit. It is designed for permanent installations only.

PERMANENT INSTALLATIONS

For perfect results, use your Two Trees hammock hooks(TT502HH) with Two Trees hammock springs(TT503HS). A rope or chain can be used as a connection between your hammock and fixture point.

NOTE: It is recommended to use structurally sound, strong timber posts that are 10cm square or more. When installing always check with a qualified builder for safety.

1. Determine the correct height to hang your hammock.
2. Drill a 10mm diameter pilot hole for hardwood (drill a 9mm hold for soft timber).
3. Fasten screw eye firmly in place. To test, apply load with caution.
4. Place the hammock spring on the hook. Repeat the process for the other side of the hammock.
5. Ensure both springs are secure and then place hammock ends over hooks.

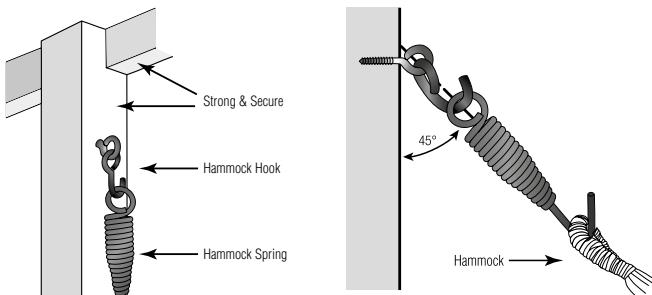

WARNING:

DO NOT EXCEED THE MAXIMUM LOAD OF 200KGS

Read instructions before use and keep for future reference. Failure to read these instructions before use can lead to an increased risk of injury. When installing always check with a qualified builder for safety.



Made in China exclusively for Mayo Hardware Pty Ltd
4 Secombe Place, Moorebank NSW 2170 Australia
Customer Service Phone: 1300 360 211

www.mayohardware.com.au | 2021®

For more information visit
www.twotreeshammocks.com.au

We will honour all statutory guarantees that this product is
of acceptable quality. (including that it is fit for purpose)